



Rockfon Contour™


Rockfon Contour™

- Aesthetically pleasing, frameless acoustic baffles
- Very quick and easy to install
- Used to enhance the sound absorption of an existing ceiling
- Ideally suited for enhancing acoustics in thermal mass areas or where frequent and unhindered access to services is required

PRODUCT DESCRIPTION

- Stone wool baffle
- Visible sides: smooth, matt white, painted fleece
- Painted edges
- Anchors points integrated during production

ASSORTMENT

Edge detail	Module size (mm)	Weight (kg/unit)	Recommended installation System
Ac 	1200 x 600 x 50	4.6	-

Contact us for special sizes, lead times and minimum quantities.




PERFORMANCES



Sound absorption

A_{eq} (m²/item)

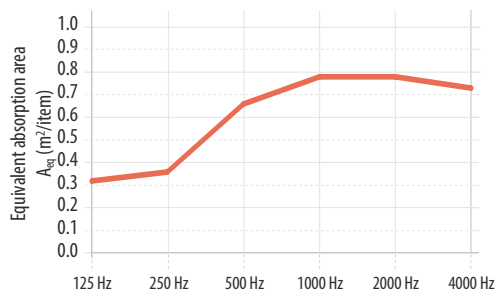

	1200x600x50: single item (1 baffle/m ² ; row distance: 83 cm)	0.32	0.36	0.66	0.78	0.78	0.73
--	--	------	------	------	------	------	------



Reaction to fire

A1



Light reflection

79%



Humidity and sag resistance

Up to 100% RH
Rockfon Contour is not suitable for use in swimming pools or outdoors. For more information, please contact Rockfon.



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Environment

Fully recyclable



Indoor environment

A selection of Rockfon products have been awarded



Understanding the unique performance of Rockfon stone wool products

Below is an explanation of ALL the performance icons and certification for our complete range of Rockfon stone wool products. For product specific performance, please refer to the information on the individual product datasheet.



Sound absorption

Sound absorption is measured in accordance with ISO 354. Sound absorption data α_p , α_w and absorption class are calculated in accordance with ISO 11654. Sound absorption properties of islands and baffles are quantified by the equivalent sound absorption area A_{eq} expressed as m^2 per item.



Room-to-room sound insulation

Room-to-room sound insulation $D_{n,f,w}$ (C;C_{tr}) is measured in accordance with ISO 10848-2.



Direct sound insulation

Sound reduction index R_w (C;C_{tr}) is measured in accordance with ISO 140-3.



Reaction to fire

Reaction to fire is classified in accordance with EN 13501-1.



Fire protection

The stone wool core of Rockfon products is non-combustible with a melting point of more than 1000°C and provides fire protection. Some Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms.



Light reflection

Light reflection expressed in % is measured in accordance with ISO 7724-2.



Humidity & sag resistance

Rockfon ceiling tiles are dimensionally stable even at humidity levels of up to 100% relative humidity and can be installed at all temperatures ranging from 0°C to 40°C. They can be installed during the very early stage of the build (when windows are not fully sealed). Their lightweight yet stable non-hygroscopic character minimises the final weight of the fully-installed ceiling. Rockfon ceiling tiles are predominantly classified as Class 1/C/ON in accordance with EN 13964. Certain module sizes (width above 700mm) are Class 2/C/ON.



Surface durability

The surface of some Rockfon products is specially treated to provide enhanced durability and dirt resistance.



Cleaning

Vacuum:

The surface can be vacuum cleaned with a soft brush attachment.

Damp cloth:

The surface can be cleaned using a damp cloth or sponge with a slightly alkaline detergent (pH between 7 and 9) without alcohol, ammonia or chlorine. This may render the surface slightly shinier, so we recommend cleaning the entire surface evenly.



Hygiene

Stone wool provides no sustenance to the following microorganisms tested in accordance with JIS Z 2801:2000 and ASTM C 1338-96:

- Escherichia coli
- Staphylococcus aureus
- Methicillin-resistant staphylococcus aureus (MRSA)
- Stachybotrys chartarum
- Penicillium brevicompactum
- Alternaria tenuissima
- Aspergillus niger
- Sporobolomyces roseum
- Rhodotorula rubra



Clean room

Clean room classification is measured in accordance with ISO 14644-1.



Thermal insulation

The thermal conductivity of products with a thickness ≥ 30 mm is measured in accordance with EN 12667 and expressed in mW/mK. Thermal resistance is expressed in m^2K/W .

08.2017 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Rockfon Shanghai
Room 1401, Summit Centre
1088, Yan'an West Rd,
Changning District
Shanghai, P.R.China (200052)
Tel. (+86) 21 6211 6725
Fax. (+86) 21 6211 3479
info@Rockfon.cn
www.cn.Rockfon.asia

Rockfon Shenzhen
No. 6 Industrial District
Tianliao Community
Guangming New Area
Shenzhen 518106 P.R.China
Tel. (+86) 755 2812 9517/
(+86) 755 2812 9518
Fax. (+86) 755 2812 9772
info@Rockfon.cn
www.cn.Rockfon.asia

Rockfon Hong Kong
Unit 2002-3, 20/F, Empress Plaza
17-19 Chatham Road South
Tsimshatsui, Kowloon,
Hong Kong
Tel. (+852) 2576 6117
Fax. (+852) 2576 6326
www.Rockfon.asia

Rockfon Malaysia
15, Jalan Gemilang 1
Taman Perindustrian
Cemerlang
81800 Ulu Tiram, Johor,
Malaysia
Tel. (+607) 8673 539
Fax. (+607) 8673 525
www.Rockfon.asia

Rockfon Singapore
No. 8, Tuas Avenue 2
Jurong Town
Singapore 639448
Tel. (+65) 6861 4722
www.Rockfon.asia