



HiLight® FiveBar













CTAs HiLight® FiveBar range of ribbed safety stair edging combines premium performance and aesthetics with maximum flexibility. Designed for high traffic situations, this range will add flair to any public area where style choices are important.


HiLight® FiveBar incorporates an elegant rib profile and the narrow inserts can be selected in any combination of black, safety yellow or grey to suit your design and safety requirements.

HiLight® FiveBar has also been designed for maximum ease of installation. All extrusions are pre-cut to order. They are supplied pre-drilled and with all the necessary fixing screws and star plugs for installation on to any hard surface or direct stick carpet application.

HiLight® FiveBar is supplied with 4 of the narrow anti-slip rib inserts attached. The remaining middle rib includes a pressure sensitive adhesive (PSA) backing, which is applied only after the fastenings.

KEY FEATURES

- Highest aesthetic appeal
- Designed for high traffic situations
- P5 rated carborundum strip inserts for maximum safety
- Concealed fixtures minimises any likelihood of vandalism
- Hard anodised extrusion provides extreme endurance
- Conforms to all aspects of the relevant safety and public access standards
- Both the recessed and surface mounted options meet the NCC requirements.

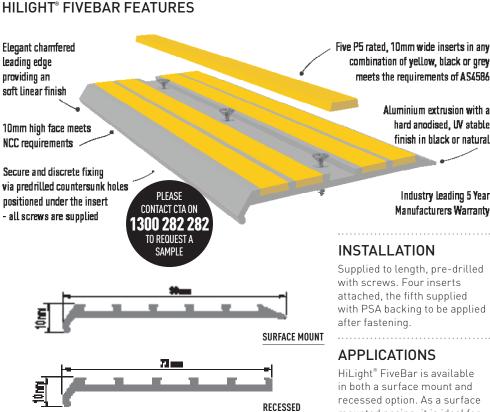

DIMENSIONS

10mm face. Surface mount 80 mm wide. Recessed 73mm wide. Five 10mm wide safety tread inserts. Supplied to length up to 3.6m.

PRODUCT OPTIONS

MODEL	SLIP RATING	INSERT	PRODUCT CODE
Surface Mount	P5	Carborundum	UM011A-SNCI-XXX
Surface Mount	P5	Egress	UM011A-SNCI-PL-XXX
Recessed	P5	Carborundum	UM012A-SNCI-XXX
Recessed	P5	Egress	UM012A-SNCI-PL-XXX

Where XXX = Insert colour (see below). Also available as a Black extrusion (UM012A160)

COMPLIANCE

All CTA products conform with the requirements of the Australian standards and are tested by NATA certified labs.

Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC National Construction Codes

LUMINANCE CONTRAST

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

WARRANTY

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on cobbletac.com.

CTA COMPLETE CARE MAINTENANCE

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

CTA INSTALLERS

CTA's accredited installers are available to do the installationwork for you - with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

MORE INFORMATION

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

INSTALLATION

Supplied to length, pre-drilled with screws. Four inserts attached, the fifth supplied with PSA backing to be applied after fastening.

combination of yellow, black or grey

meets the requirements of AS4586

Aluminium extrusion with a hard anodised, UV stable

finish in black or natural

Industry leading 5 Year

Manufacturers Warranty

APPLICATIONS

HiLight® FiveBar is available in both a surface mount and recessed option. As a surface mounted nosing, it is ideal for retrofitting, to stairs where allowance for recessing has not been made or is not feasible. The recessed option is ideal for installation against other floor coverings such as vinyl or carpet. This is a very high performing product, displaying outstanding durability in any internal or external application such as railway stations and egress stairways.

MATERIAL

Manufactured from heavy duty tempered aluminium extrusions

HILIGHT® SAFETY INSERT SYSTEM

The HiLight® family of safety stair edging utilises a common insert system. Comprised of a 10mm wide Carborundum P5 rated insert in three colours, these inserts offer the specifier the ability to mix colours to create the desired effect. A photo-luminescent option is also available. Please contact CTA for product images and to request a sample in the colours of your choice.

	Carb	Egress
AS 4586 Rating	P5	P5
Material	Carborundum	Carborundum & Photo-Luminescent
Colours	Yellow / Grey / Black	Yellow / Grey / Black
Warranty / Life Expectancy	5 Years / 10+ years	5 Years / 10+ years
YELLOW ¹¹²	GREY ¹⁵⁵	BLACK ¹⁶⁰

CALL CTA ON 1300 282 282 TO ARRANGE A MEETING WITH A SALES CONSULTANT



