



# SafeLine® Twin

**TWELVE MONTH**  
MANUFACTURERS WARRANTY

**RATED P5**  
SLIP RESISTANCE FOR MAXIMUM SAFETY

**NCC COMPLIANT**

**HEAVY DUTY TEMPERED ALUMINIUM EXTRUSIONS**

**VANDAL PROOF INSTALL SYSTEM**

**NEW TWIN INSERT RANGE**

CTA SafeLine® Twin is a budget alternative to the ProStep® range. Even though this is a lower cost product, SafeLine® Twin still features the characteristics of high safety, ease of installation and durability of ProStep® Classic.

SafeLine® Twin includes the SafeLine® range of strip insert safety tapes, which are manufactured from a unique combination of aluminium oxide and a thick plastic carrier to provide a flexible yet durable anti-slip solution.

The inserts are formulated to resist water, steam and detergent and will withstand continuous temperatures in the range -30°C to 120°C.

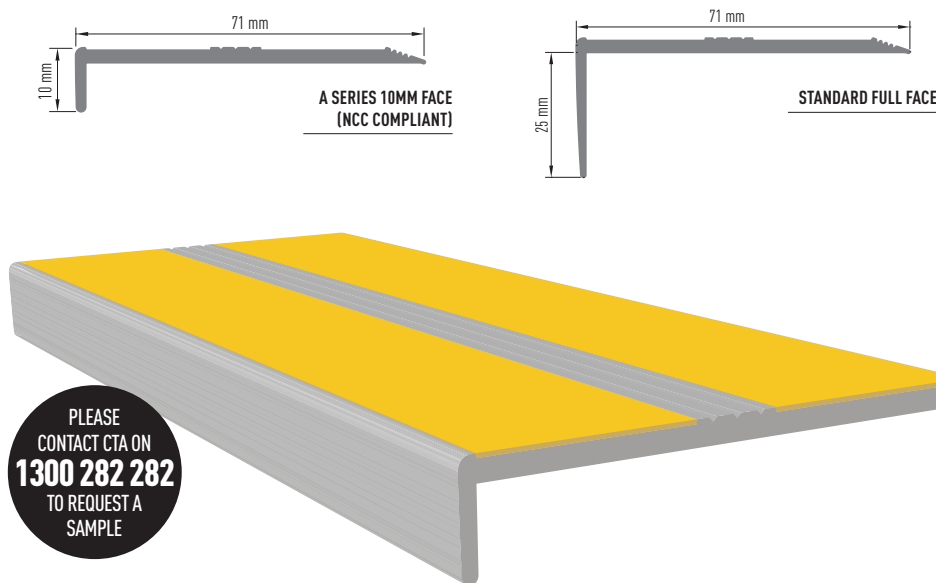
SafeLine® Twin stair nosing comes with the SafeLine® insert pre-assembled, which are pre-cut to length and pre-drilled, and supplied with fixing screws and star plugs.

## KEY FEATURES

- Easy to install with no fuss - ideal for DIY applications
- Provide an P5 safety rating, the highest in the industry
- SafeLine® inserts are also available as spares and are easily replaced in the event of damage
- Conforms to all aspects of the relevant safety and public access standards
- Available in A Series to meet the NCC requirements.

**SAFELINE® TWIN PROFILE**

Available in 10mm face *A Series* (NCC compliant) and 25mm full face *Standard*.

**COMPLIANCE**

All CTA products conform with the requirements of the Australian standards and are tested by a NATA certified laboratory. Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC - National Construction Codes

**LUMINANCE CONTRAST**

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

**WARRANTY**

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on [www.ctagroup.com.au](http://www.ctagroup.com.au)

**PRODUCT OPTIONS**

MODEL	SLIP RATING	INSERT	PRODUCT CODE
A Series (10mm)	P5	SafeLine	UM010A-XXX
Standard (25mm)	P5	SafeLine	UM010-XXX

Where XXX = tape colour (see right). Also available as a Black extrusion (UM010A160)

**MATERIAL**

Manufactured from heavy duty tempered aluminium extrusions and SafeLine® inserts – a unique combination of aluminium oxide and a thick plastic carrier.

**APPLICATIONS**

SafeLine® Twin stair nosing is particularly suitable for light duty pedestrian traffic in internal and external flooring surfaces prone to water or oil spillage.

**DIMENSIONS**

10mm face edge and 72mm wide. Twin 25mm wide SafeLine safety tread inserts. Supplied to length up to 3.6m.

**INSTALLATION**

Supplied to length, pre-drilled with screws and ready for installation.

**COLOURS****CTA COMPLETE CARE MAINTENANCE**

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

**CTA INSTALLERS**

CTA's accredited installers are available to do the installation work for you – with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

**MORE INFORMATION**

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

**CALL CTA ON 1300 282 282**  
TO ARRANGE A MEETING WITH A SALES CONSULTANT

VICTORIA | NEW SOUTH WALES | QUEENSLAND | WESTERN AUSTRALIA

